

Apartemen Sentra Timur Retail H08EB Jl. Pahlawan Komarudin Raya Sisi Timur Toll Lingkar Luar Pulogebang Jakarta Timur Indonesia

Hp1:085693736978, Hp2:089655073181, Hp3:085217304428, Hp4:085100538248, Hp5:085100941343, Hp6:085218300576,
Hp7:087782575187, Hp8:085885615314, Hp9:087880317971, SMS1:085217304428, SMS2:085817386829, SMS3:085817846500,

BBM:51DAA83F WA1:085217304428, WA2:089655073181, Fax:021-48703967,

Website: www.purewatercare.com Email: purewatercare@gmail.com

Jam Pelayanan : Senin s/d Sabtu Pukul 08.00 s/d 17.00 wib

Ultraviolet

water sterilizer



Ultraviolet yang tersedia :

UV Sterilight

UV Starlight

UV Wonderlight

Lampu UV

Ultraviolet

Ultraviolet adalah alat berupa tabung sinar ultraviolet yang dapat digunakan untuk mensterilkan air minum.

Alat ini berbentuk tabung dimana didalamnya terdapat lampu yang dapat membangkitkan sinar ultraviolet yang digunakan untuk mensterilkan air yang melewati lampu atau sinar tersebut.

Alat ini terdiri dari 2 bagian yaitu Adaptor dan Tabung UV. Adaptor berguna untuk menyediakan catuan daya listrik sesuai dengan tegangan dan arus yang dibutuhkan oleh lampu uv didalam tabung. Bagian yang kedua adalah Tabung UV yang berguna untuk menempatkan lampu ultraviolet. Pada bagian inilah air minum dialirkan masuk kedalam ruangan steril yang berisi sinar ultraviolet Akibat adanya sinar ultraviolet inilah maka kuman, bakteri dimatikan sehingga keluaran dari tabung air sudah steril.



Ultraviolet Sterilight S8Q-PA Canada 8gpm

Spesifikasi:

1. Capacity : 7,8 gpm (1.8 m³/hr)
2. Voltage : 100V-240 Volt AC
3. Frequency : 50-60 Hz
4. Power Consumption : 46 Watt
5. Size input/output : 3/4" MNPT
6. UV Lamp : 37 W
7. Material Chamber : Stainless AISI 304
8. Dosis : 1,8 m³/hr
9. Lifetime : >9000 hours
10. Maximum Pressure : 8,62 Bar (125 Psi)
11. Warning system
12. Temperatur : 2-40 C

Ultraviolet Sterilight S12Q-PA Canada 12gpm


Spesifikasi:

1. Capacity : 11gpm (2.5 m³/hr)
2. Voltage : 100V-240 Volt AC
3. Frequency : 50-60 Hz
4. Power Consumption : 48 Watt
5. Size input/output : 3/4" MNPT
6. UV Lamp : 39 W
7. Material Chamber : Stainless AISI 304
8. Dosis : 2,5 m³/hr
9. Lifetime : >9000 hours
10. Maximum Pressure : 8,6 Bar (125Psi)
11. Warning system
12. Temperatur : 2-40 C



Sterilight dengan tipe lain

SPESIFICATIONS		S1Q-PA	S2Q-PA	S5Q-PA	S8Q-PA	S12Q-PA
Flow rate (Dose Dependent)						
30 mJ/cm ² (VIQUA Standard)		3.785 L/min 1 gpm 0.227 m ³ /hr.	7.57 L/min 2 gpm 0.454 m ³ /hr.	18.925 L/min 5 gpm 1.135 m ³ /hr.	30.28 L/min 8 gpm 1.816 m ³ /hr.	45.42 L/min 12 gpm 2.725 m ³ /hr.
Dimension	Length	39.4 cm	43.4 cm	56.1 cm	90.4 cm	95.3 cm
	Width	6.5 cm	6.5 cm	6.5 cm	6.5 cm	8.9 cm
	Height	6.5 cm	6.5 cm	6.5 cm	6.5 cm	8.9 cm
	Cell Dia.	6.5 cm	6.5 cm	6.5 cm	6.5 cm	8.9 cm
Shipping Weight		2.3 kg	2.7 kg	3.2 kg	4.5 kg	5.4 kg
Electrical Voltage		100-130V./50-60 Hz	100-130V./50-60 Hz	100-130V./50-60 Hz	100-130V./50-60 Hz	100-130V./50-60 Hz
Power Consumption (Watts)		16 W	19 W	26 W	39 W	42 W
Lamp Watts		14 W	17 W	24 W	37 W	39 W
Maximum Operating Pressure		8.62 bar	8.62 bar	8.62 bar	8.62 bar	8.62 bar
Ambient Temperature		2 - 40°C	2 - 40°C	2 - 40°C	2 - 40°C	2 - 40°C
Quartz Sleeve		Yes	Yes	Yes	Yes	Yes
Inlet/Output Port Size		1/4" MNPT	1/2" MNPT	3/4" MNPT	3/4" MNPT	"Combo" 3/4" FNPT & 1" MNPT
Visual "Power-On"		Yes	Yes	Yes	Yes	Yes
Audible Lamp Failure		Yes	Yes	Yes	Yes	Yes

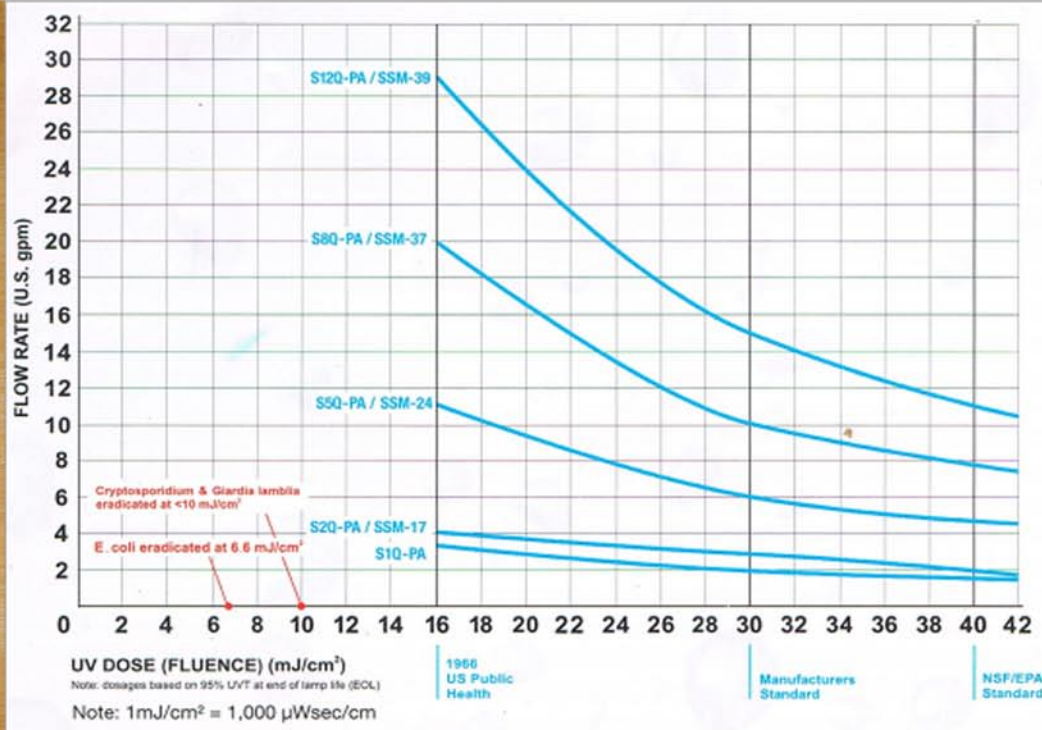

Replacement Parts

S287RL	UV lamp for S1Q-PA/SSM-14	QS-463	quartz sleeve for S5Q-PA/SSM-24
S330RL	UV lamp for S2Q-PA/SSM-17	QS-810	quartz sleeve for S8Q-PA/SSM-37
S463RL	UV lamp for S5Q-PA/SSM-24	QS-012	quartz sleeve for S12Q-PA/SSM-39
S810RL	UV lamp for S8Q-PA/SSM-37	410867	o-ring for quartz sleeves
S36RL	UV lamp for S12Q-PA/SSM-39	RN-001	gland-nut for all systems
QS-001	quartz sleeve for S1Q-PA/SSM-14	QS-330	quartz sleeve for S2Q-PA/SSM-17
BA-ICE-S	electronic ICE controller (100-240V./50-60Hz.)		

Ultraviolet Wonder 1gpm



UV 1gpm

Spesifikasi:

1. Capacity : 1 gpm
2. Input : 230V, 50Hz
3. Frequency : 120V60 and 230/60Hz units are standard
4. Size input/output : 1/4 NPT or BPS"
5. UV Lamp : 6 W
6. Recommended ambient temperature: 2-4 Derajat C (36-104 Derajat F)
7. Lifetime : 8000-9000 hours of operation (approx.12 months of continous service)
8. Maximum Pressure : 100 psi

Spesifikasi:

1. Capacity : 8 gpm
2. Input : 230V, 50Hz
3. Frequency : 120V60 and 230/60Hz units are standard
4. Size input/output : 1/2" NPT or BPS option 3/4" NPT or BPS
5. UV Lamp : 29 W
6. recommended ambient temperature: 2-4 Derajat C (36-104 Derajat F)
7. Lifetime : 8000-9000 hours of operation (approx.12 months of continous service)
8. Maximum Pressure : 100 psi

Ultraviolet Wonder 8gpm




UV 8gpm/UV 12gpm

Ultraviolet Wonder 12gpm


Spesifikasi:

1. Capacity : 12 gpm
2. Input : 230V, 50Hz
3. Frequency : 120V60 and 230/60Hz units are standard
4. Size input/output : 3/4" NPT or BPS option 1" NPT or BPS
5. UV Lamp : 40 W
6. recommended ambient temperature: 2-4 Derajat C (36-104 Derajat F)
7. Lifetime : 8000-9000 hours of operation (approx.12 months of continous service)
8. Maximum Pressure : 100 psi

Series PC

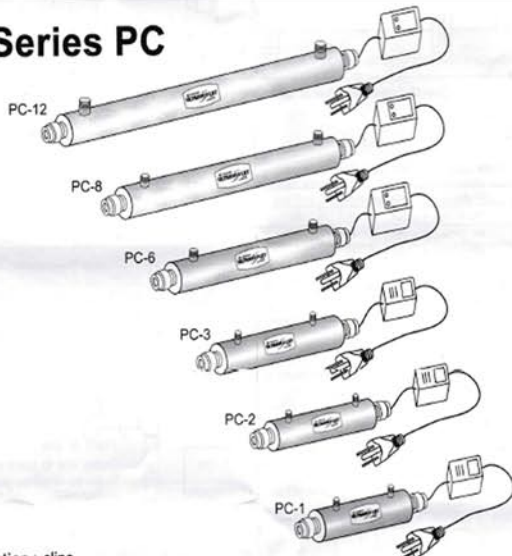

Option : clips



Model	Standard Inlet & Outlet Size	Option
PC-1	1/4" NPT or BSP	-
PC-2	1/4" NPT or BSP	1/2" NPT or BSP
PC-3	1/2" NPT or BSP	-
PC-6	1/2" NPT or BSP	-
PC-8	1/2" NPT or BSP	3/4" NPT or BSP
PC-12	3/4" NPT or BSP	1" NPT or BSP

Item	Description	Model					
		PC-1	PC-2	PC-3	PC-6	PC-8	PC-12
1	Water Proof Strainer	PG135	PG135	PG135	PG135	PG135	PG135
2	Aluminium Nut	A02	A02	A02	A02	A02	A02
3	Lamp Socket & Lead Wire	4P80	4P80	4P80	4P80	4P80	4P80
4	Germicidal Ultraviolet Lamp	T510	T514	T515	T521	T529	T540
5	Rubber O-Ring	21735	21735	21735	21735	21735	21735
6	Quartz Sleeve	T245250	T245330	T245350	T245530	T245680	T245910
7	Chamber	ST508245	ST635310	ST635330	ST635510	ST635660	ST635890
8	Clip	1002	1002	1002	1002	1002	1002
9	Ballast	UV-1/UV-3	UV-1/UV-3	UV-1/UV-3	UV-1/UV-6	UV-6	UV-6

Ultraviolet Starligh 8gpm



Lampu UV R-CAN Model S36 RL for S12Q-PA/SSM-39 RN-001



Selain tipe diatas kami juga menyediakan spare part untuk tipe lainnya sbb:
S287RL – UV lamp for S1Q-PA/SSM-14 QS-463
S330RL – UV lamp for S2Q-PA/SSM-17 QS-810
S463RL – UV lamp for S5Q-PA/SSM-24 QS-012
S810RL – UV lamp for S8Q-PA/SSM-37 410867
S36RL – UV lamp for S12Q-PA/SSM-39 RN-001

Tersedia juga adaptor/controller-nya sbb:
BA-ICE-S – electronic ICE controller (100-240V./50-60Hz.)
BA-ICE-SM – electronic ICE monitored controller (100-240V./50-60Hz.)

Lampu UV Phillips 30W



Lampu untuk UV Starlight, Top Win dan UV Lokal



Lampu UV Osram 30W



Lampu untuk UV Starlight, Top Win dan UV Lokal

Pure Water Care, Water Treatment Management

Apartemen Sentra Timur Retail H08EB

Jl. Pahlawan Komarudin Raya Sisi Timur Toll Lingkar Luar Pulogebang Jakarta Timur

Hp1:085693736978, Hp2:089655073181, Hp3:085697084520, Hp4:085218300576, Hp5:02168941343, Hp6:02170538248,

Hp7:087782575187, Hp8:085885615314, Hp9:087880317971, SMS:085217304428, Fax:021-48703967

WA1:085217304428, WA2:089655073181, BBM:51DAA83F,

Email: purewatercare@gmail.com; Website: www.purewatercare.com

Jam Pelayanan : Senin s/d Sabtu Pukul 08.00 s/d 17.00 wib,